



145 Royal Crest Court Unit 42 Markham, ON, Canada L3R 9Z4
Tel: 905-477-1166 Fax: 905-477-1782 <http://www.orientdisplay.com>

SPECIFICATION FOR LCM MODULE

MODULE NO.: AFA480272CT-4.3-A03
DOC. REVISION00

Customer Approval:

| |
|--|
| |
|--|

| | SIGNATURE | DATE |
|------------------------------|-----------|------|
| PREPARED BY (RD ENGINEER) | | |
| PREPARED BY (QA ENGINEER) | | |
| CHECKED BY | | |
| APPROVED BY | | |

DOCUMENT REVISION HISTORY

| Version | DATE | DESCRIPTION | CHANGED BY |
|---------|------------|-------------|------------|
| 00 | 2010-05-09 | First issue | |

CONTENTS

| | |
|-------------------------------------|-------|
| 1. Functions & Features | 2 |
| 2. Mechanical specifications | 2 |
| 3. Block diagram | 2 |
| 4. Dimensional Outline | 3 |
| 5. Pin description | 4 |
| 6. Maximum absolute limit | 4 |
| 7. Electrical characteristics | 5 |
| 8. Electro-Optical characteristics | 5 |
| 9. Timing Characteristics | 6 |
| 10. Control and Display Instruction | 7-9 |
| 11. Quality Specifications | 10-18 |

1. Functions & Features

| | |
|----------------------------------------------|----------------|
| 1.1. Format | : 480x272 Dots |
| 1.2. LCD mode | : Transmissive |
| 1.3. Viewing direction | : 6 O'clock |
| 1.4. Display color | : Black/White |
| 1.5. Operation temp | : -20~70 °C |
| 1.6. Storage temp | : -30~80 °C |
| 1.7. Power supply voltage (V _{DD}) | : 3.3V |
| 1.8. LED power voltage | : 3.3V |
| 1.9. Backlight color | : White(LED) |
| 1.10 LCM Contrast ratio | : 300:1 |
| 1.11 LCM Brightness | : 200 nit(eye) |
| 1.12. RoHS standard | |

2. MECHANICAL SPECIFICATIONS

| | |
|-------------------|-----------------------------------------|
| 2.1. Module size | : 120.0mm(L)*85.0mm(W)*11.0 Max) mm (H) |
| 2.2. Viewing area | : 95.04mm(L)*53.86mm(W) |
| 2.3. Pixel size | : 198um(W)*198um(H) |
| 2.4. Weight | : Approx. |

3. BLOCK DIAGRAM

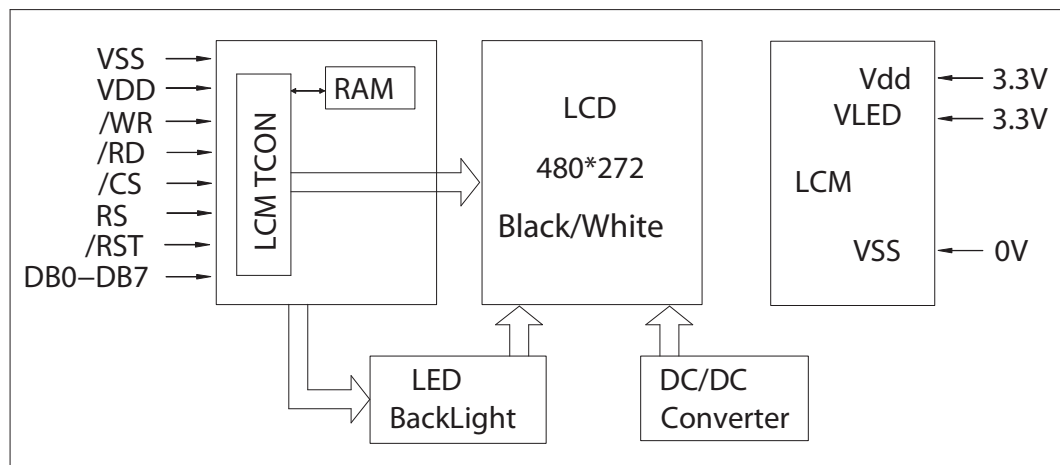


Figure 1. Block diagram

4. DIMENSIONAL OUTLINE

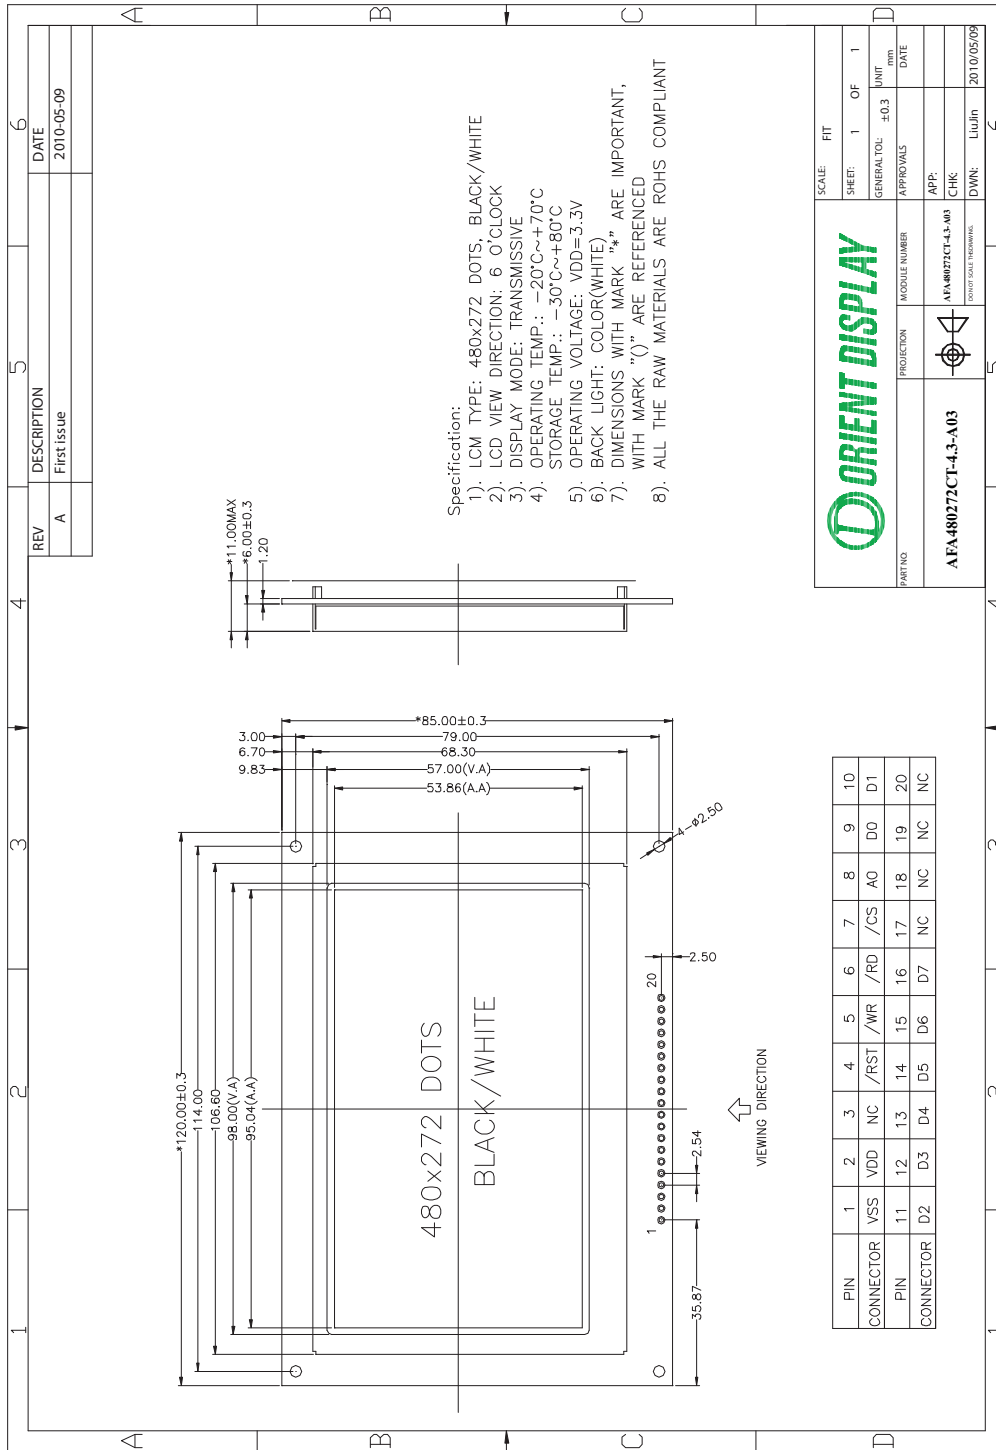


Figure 2. Dimensional outline

5. PIN DESCRIPTION

| No. | Symbol | Function |
|-----|--------|--------------------------------------------------------------|
| 1 | VSS | GND |
| 2 | VDD | Logic supply voltage (3.3V) |
| 3 | LED+ | Power supply for backlight(+3.3V) |
| 4 | /RST | Reset signal (L) |
| 5 | /WR | Write signal |
| 6 | /RD | Read signal |
| 7 | /CS | Chip enable signal |
| 8 | A0 | Register selection (H:Data register, L:Instruction register) |
| 9 | D0 | Data bus line |
| 10 | D1 | Data bus line |
| 11 | D2 | Data bus line |
| 12 | D3 | Data bus line |
| 13 | D4 | Data bus line |
| 14 | D5 | Data bus line |
| 15 | D6 | Data bus line |
| 16 | D7 | Data bus line |
| 17 | NC | --- |
| 18 | NC | --- |
| 19 | NC | --- |
| 20 | NC | --- |

6. MAXIMUM ABSOLUTE LIMIT

| Item | Symbol | MIN | MAX | Unit |
|-----------------------------------------|----------------------------|------|--------------|-------------|
| Supply Voltage for Logic | V_{DD} | -0.3 | 3.6 | V |
| Input Voltage | V_{in} | -0.3 | $V_{DD}+0.3$ | V |
| Supply Current (Without Backlight) | $I_{DD}(Ta = 25^{\circ}C)$ | | 60 | mA |
| Supply Current for Backlight | $I_F(Ta = 25^{\circ}C)$ | --- | 120 | mA |
| Reverse Voltage for Backlight | $V_R(Ta = 25^{\circ}C)$ | --- | 3.6 | V |
| Operating Temperature | Top | -20 | 70 | $^{\circ}C$ |
| Storage Temperature | Tst | -30 | 80 | $^{\circ}C$ |

7. ELECTRICAL CHARACTERISTICS

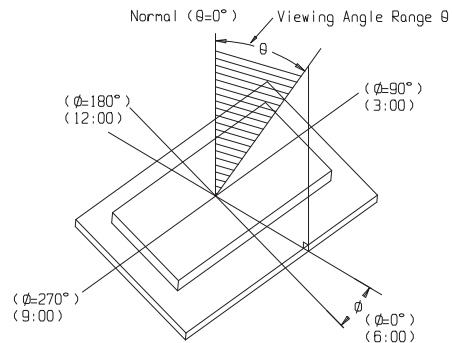
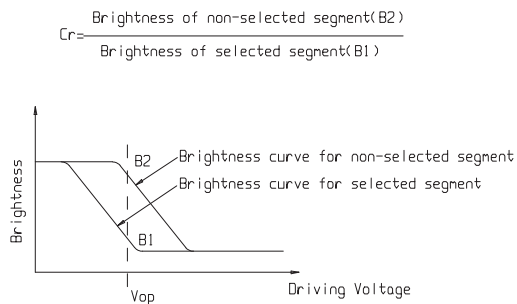
| Item | Symbol | Condition | Min | Typ | Max | Unit |
|-------------------------------------------|-----------------|--------------------------|-------------|-----|-------------|------------------------|
| Supply Voltage for Logic | $V_{DD}-V_{SS}$ | $T_a = 25^\circ\text{C}$ | 3.0 | 3.3 | 3.6 | V |
| Input High Voltage | V_{IH} | $T_a = 25^\circ\text{C}$ | $0.8V_{DD}$ | --- | V_{DD} | V |
| Input Low Voltage | V_{IL} | $T_a = 25^\circ\text{C}$ | 0 | --- | $0.2V_{DD}$ | V |
| Output High Voltage | V_{OH} | $T_a = 25^\circ\text{C}$ | $0.8V_{DD}$ | --- | V_{DD} | V |
| Output Low Voltage | V_{OL} | | 0 | --- | $0.2V_{DD}$ | V |
| Supply Current (Without Backlight) | I_{DD} | $T_a = 25^\circ\text{C}$ | -- | 65 | 75 | mA |
| Backlight Current | IR | $T_a = 25^\circ\text{C}$ | 0 | | | mA |
| Luminous Intensity (With LCD dots off) | IV | $V_{led}=5.0$ V | 150 | 200 | --- | Cd/m^2 |
| LED Backlight Color | White | | | | | |

| Item | Symbol | Condition | Min | Typ | Max | Unit |
|---------------|--------|--------------------------------------------------------------------------------|-----|--------|-----|------|
| LED Life time | --- | $T_a = 25^\circ\text{C}$ Humidity: 70% below Forward Current: 20mA | --- | 50,000 | --- | Hr |

8. ELECTRO-OPTICAL CHARACTERISTICS

($V_{DD}=3.3\text{V}, V_{led}=5.0\text{V}, T_a = 25^\circ\text{C}$)

| Item | Symbol | Condition | Min | Typ | Max | Unit |
|-----------------------------------|------------|--------------------------|-----|-----|-----|------------------------|
| Viewing angle ($CR \geq 10$) | θ_L | $=180^\circ$ (9 o'clock) | 45 | 60 | --- | degree |
| | θ_R | $=0^\circ$ (3 o'clock) | 45 | 60 | --- | |
| | θ_T | $=90^\circ$ (12 o'clock) | 35 | 50 | --- | |
| | θ_B | $=270^\circ$ (6 o'clock) | 40 | 55 | --- | |
| Response time | T_{on} | Normal | --- | 10 | 20 | ms |
| | T_{off} | | --- | 15 | 25 | ms |
| Contrast ratio | Cr | $\theta = 0^\circ$ | 150 | 300 | --- | --- |
| Luminance | L1 | | 150 | 200 | | Cd/m^2 |



9. TIMING CHARACTERISTICS

9.1 Interface Timing

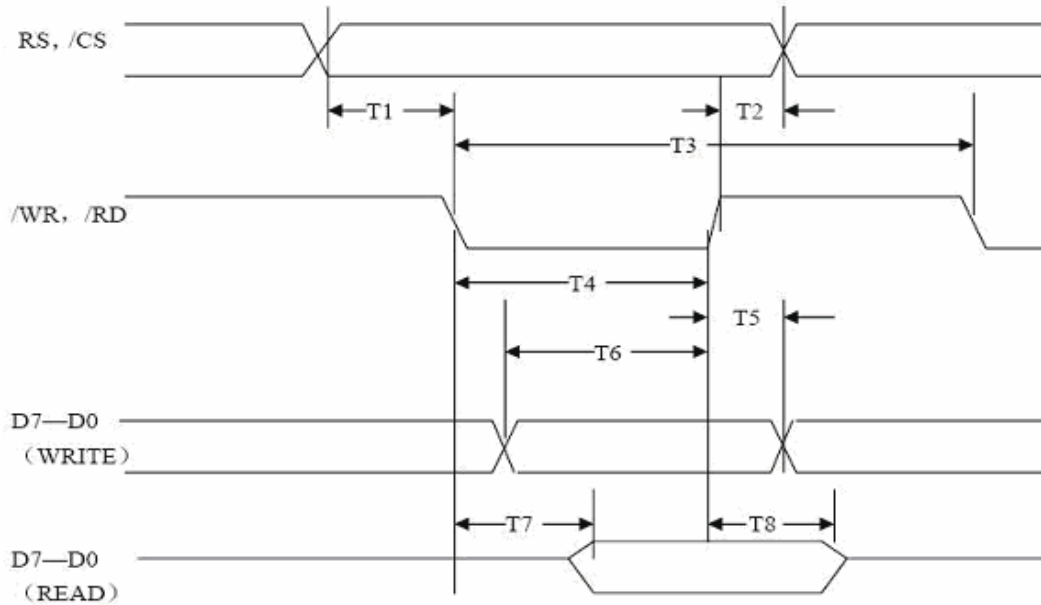


Figure 4. 8080 family Interface Timing

9.2 MCU Interface

| Signal | Symbol | Parameter | VDD=33V | | Unit | Condition |
|---------|--------|---------------------|---------|-----|------|-----------|
| | | | Min | Max | | |
| RS,/CS | T2 | Address hold time | 10 | - | ns | CL=100pF |
| | T1 | Address setup time | 0 | - | ns | |
| /WR,/RD | T3 | System cycle time | 320 | - | ns | |
| | T4 | Strobe pulsewidth | 160 | - | ns | |
| D0-D7 | T5 | Data hold time | 80 | - | ns | |
| | T6 | Data setup time | 120 | - | ns | |
| | T7 | /RD Access time | - | 50 | ns | |
| | T8 | Output disable time | 10 | 50 | ns | |

10. CONTROL AND DISPLAY INSTRUCTION

10.1 Instruction

| Command (Hex) | Command Code | | | | | | | | Function | | | | | |
|------------------------------------|--------------|----|-----|-----|----|----|----|----|----------|----|----|----|----|-------------------------------------------------------------|
| | /CS | RS | /WR | /RD | D7 | D6 | D5 | D4 | | D3 | D2 | D1 | D0 | |
| 0x80 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Display on glayer1 Read and Write on glayer1 |
| 0x81 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | Display and Read on glayer1 Write on glayer2 |
| 0x82 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | Display and Write on glayer1 Read on glayer2 |
| 0x83 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | Display on glayer1 Write and Read on glayer2 |
| 0x84 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | Display on glayer2 Read and Write on glayer1 |
| 0x85 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | Display and Write on glayer2 Read on glayer1 |
| 0x86 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | Display and Read on glayer2 Write on glayer1 |
| 0x87 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | Display on glayer2 Write and Read on glayer2 |
| 0x90 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | Black light off |
| 0x91 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | Black light on |
| 0xa0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | Mix Mode off (Single layer display) (Figure 5. Figure 6) |
| 0xa1 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | Mix Mode on (Figure 7.) |
| 0xfc | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | display off |
| 0xfd | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | display on |
| Address set X(0~59) Y(0~272) | 0 | 0 | 0 | 1 | 0 | 0 | -- | -- | -- | -- | -- | -- | -- | Write X Addresss |
| | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | -- | Write Y Addresss (H) |
| | 0 | 0 | 0 | 1 | -- | -- | -- | -- | -- | -- | -- | -- | -- | Write Y Addresss (L) |
| Write data | 0 | 1 | 0 | 1 | | | | | | | | | | Write display data |
| Read data | 0 | 1 | 1 | 0 | | | | | | | | | | Read display data |




Figure 5.

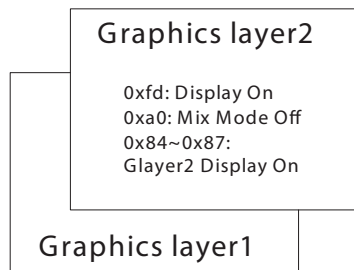


Figure 6.

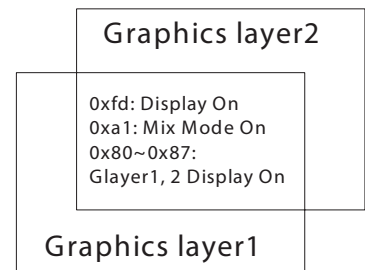


Figure 7.

10.2 Display Data format(Black/White)

| MSB | | | | | | L | | SB |
|-----|-----|-----|-----|-----|-----|-----|-----|----|
| DB7 | DB6 | DB5 | DB4 | DB3 | DB2 | DB1 | DB0 | |
| | | | | | | | | |

10.3 Program Example

```
// VDD=3.3V Vled=3.3V
#include <reg51.h>
#define uint unsigned int
#define uchar unsigned char

sbit CS   = P3^2;
sbit RS   = P3^3;
sbit WRR  = P3^4;
sbit RDD  = P3^5;
sbit RST  = P3^6;

void wcomd(uchar ch)
{
    RDD=1;RS=0;CS=0;
    P1=ch;
    WRR=0;
    WRR=1;
    CS=1;
}

void wdata(uchar ch)
{
    RDD=1;RS=1;CS=0;
    P1=ch;
    WRR=0;
    WRR=1;
    CS=1;
}

unsigned char rdata(void)
{
    uchar ch;
    WRR=1;RS=1;CS=0;
    P1=0xff;
    RDD=0;
    ch=P1;
    RDD=1;
    CS=1;
    return(ch);
}

void waddr(uint xdat,uint ydat)
{
    uint yyh,yyl;
    yyh=ydat/256;
    yyl=ydat%256;
    wcomd(xdat);
    wcomd(yyh);
    wcomd(yyl);
}
```

```

void initial_tft()
{
    wcomd(0x91);          //led light on
    wcomd(0xfc);         //display on
    wcomd(0xa0);         //mix mode off
}

void disp_all(uchar xsdath, uchar xsdatl)
{
    uint j,k;
    waddr(0x00,0x00);
    for(k=0;k<272;k++)
    {
        for(j=0;j<60;j++)
        {
            wdata(xsdath);
            wdata(xsdatl);
        }
    }
}

void main(void)
{
    RST=0;delay(50);RST=1;delay(20);
    initial();
    while(1)
    {
        wcomd(0x80);          //display glayer1 (0x80~0x83)
        disp_all(0xaa);      //write display data
        delay(200);

        wcomd(0x87);          //display glayer2 (0x84~0x87)
        disp_all(0x55);      //write display data
        delay(200);

        wcomd(0xa1);          //mix mode on
        delay(200);
        wcomd(0xa0);          //mix mode off
        delay(200);

        wcomd(0xfc);          //display off
        delay(200);
        wcomd(0xfd);          //display on
        delay(200);

        .....
    }
}

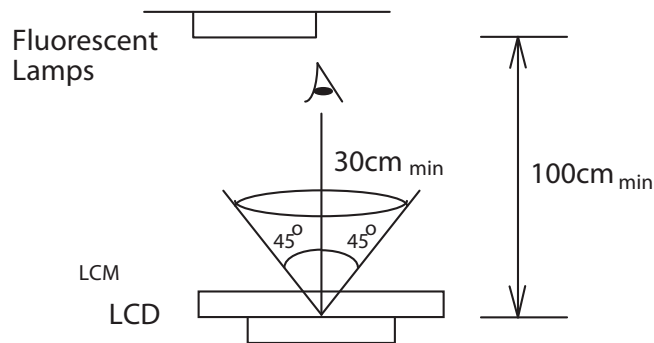
```

11.QUALITY SPECIFICATIONS


11.1 Standard of the product appearance test

Manner of appearance test: The inspection should be performed in using 20W x 2 fluorescent lamps. Distance between LCM and fluorescent lamps should be 100 cm or more. Distance between LCM and inspector eyes should be 30 cm or more.

Viewing direction for inspection is 45° from vertical against LCM.



Definition of zone:



A Zone: Active display area (minimum viewing area).

B Zone: Non-active display area (outside viewing area).

11.2 Specification of quality assurance

AQL inspection standard



Sampling method: MIL-STD-105E, Level II, single sampling

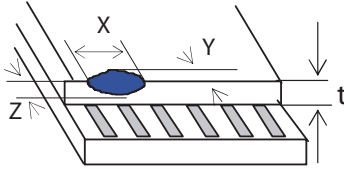
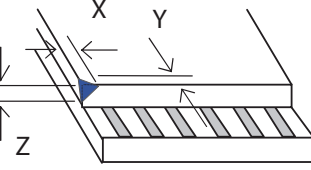
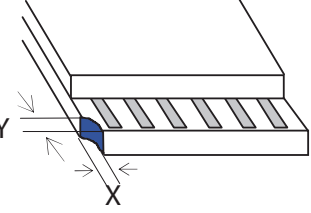
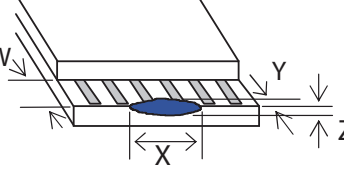
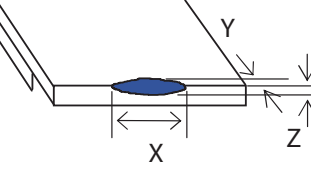
Defect classification (Note: * is not including)


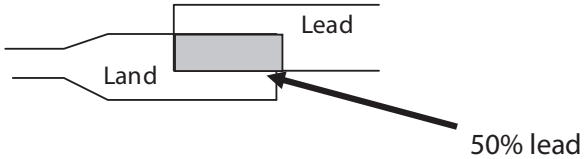
| Classify | Item | | Note | AQL |
|----------|---------------|-----------------------|------|------|
| Major | Display state | Short or open circuit | 1 | 0.65 |

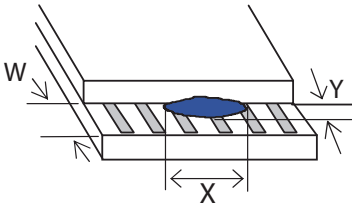
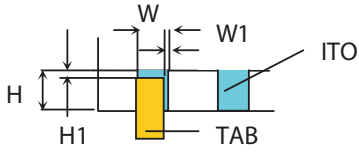
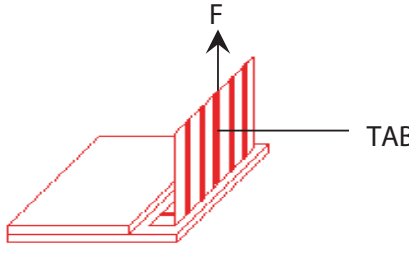
| | | | | |
|-------|---------------|------------------------------|-----|-----|
| | | LC leakage | | |
| | | Flickering | | |
| | | No display | | |
| | | Wrong viewing direction | | |
| | | Contrast defect (dim, ghost) | 2 | |
| | | Back-light | 1,8 | |
| | Non-display | Flat cable or pin reverse | 10 | |
| | | Wrong or missing component | 11 | |
| Minor | Display state | Background color deviation | 2 | 1.0 |
| | | Black spot and dust | 3 | |
| | | Line defect, Scratch | 4 | |
| | | Rainbow | 5 | |
| | | Chip | 6 | |
| | | Pin hole | 7 | |
| | Polarizer | Protruded | 12 | |
| | | Bubble and foreign material | 3 | |
| | Soldering | Poor connection | 9 | |
| | Wire | Poor connection | 10 | |
| | TAB | Position, Bonding strength | 13 | |

Note on defect classification

| No. | Item | Criterion | | | | | | | | | | | | | | | | | | | | |
|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------|---------------------|-----------|----------------------------|---|----------------------------|----------------|----------------------------|--------------|------------------|---|--------------|---------------|--------------|-----------|---|-----|------------|-------------------------|
| 1 | Short or open circuit | Not allow | | | | | | | | | | | | | | | | | | | | |
| | LC leakage | | | | | | | | | | | | | | | | | | | | | |
| | Flickering | | | | | | | | | | | | | | | | | | | | | |
| | No display | | | | | | | | | | | | | | | | | | | | | |
| | Wrong viewing direction | | | | | | | | | | | | | | | | | | | | | |
| | Wrong Back-light | | | | | | | | | | | | | | | | | | | | | |
| 2 | Contrast defect | Refer to approval sample | | | | | | | | | | | | | | | | | | | | |
| | Background color deviation | | | | | | | | | | | | | | | | | | | | | |
| 3 | Point defect, Black spot, dust (including Polarizer) $\varphi = (X+Y)/2$ |  <table border="1" data-bbox="922 915 1318 1188"> <thead> <tr> <th>Point Size</th> <th>Acceptable Qty.</th> </tr> </thead> <tbody> <tr> <td>$\varphi \leq 0.10$</td> <td>Disregard</td> </tr> <tr> <td>$0.10 < \varphi \leq 0.20$</td> <td>3</td> </tr> <tr> <td>$0.20 < \varphi \leq 0.25$</td> <td>2</td> </tr> <tr> <td>$0.25 < \varphi \leq 0.30$</td> <td>1</td> </tr> <tr> <td>$\varphi > 0.30$</td> <td>0</td> </tr> </tbody> </table> <p>Unit: mm</p> | Point Size | Acceptable Qty. | $\varphi \leq 0.10$ | Disregard | $0.10 < \varphi \leq 0.20$ | 3 | $0.20 < \varphi \leq 0.25$ | 2 | $0.25 < \varphi \leq 0.30$ | 1 | $\varphi > 0.30$ | 0 | | | | | | | | |
| Point Size | Acceptable Qty. | | | | | | | | | | | | | | | | | | | | | |
| $\varphi \leq 0.10$ | Disregard | | | | | | | | | | | | | | | | | | | | | |
| $0.10 < \varphi \leq 0.20$ | 3 | | | | | | | | | | | | | | | | | | | | | |
| $0.20 < \varphi \leq 0.25$ | 2 | | | | | | | | | | | | | | | | | | | | | |
| $0.25 < \varphi \leq 0.30$ | 1 | | | | | | | | | | | | | | | | | | | | | |
| $\varphi > 0.30$ | 0 | | | | | | | | | | | | | | | | | | | | | |
| 4 | Line defect, Scratch |  <table border="1" data-bbox="857 1346 1356 1583"> <thead> <tr> <th colspan="2">Line</th> <th>Acceptable Qty.</th> </tr> <tr> <th>L</th> <th>W</th> <th></th> </tr> </thead> <tbody> <tr> <td>---</td> <td>$0.015 \geq W$</td> <td>Disregard</td> </tr> <tr> <td>$5.0 \geq L$</td> <td>$0.03 \geq W$</td> <td rowspan="2">2</td> </tr> <tr> <td>$5.0 \geq L$</td> <td>$0.05 \geq W$</td> </tr> <tr> <td>$5.0 \geq L$</td> <td>$0.1 > W$</td> <td>1</td> </tr> <tr> <td>---</td> <td>$0.05 < W$</td> <td>Applied as point defect</td> </tr> </tbody> </table> <p>Unit: mm</p> | Line | | Acceptable Qty. | L | W | | --- | $0.015 \geq W$ | Disregard | $5.0 \geq L$ | $0.03 \geq W$ | 2 | $5.0 \geq L$ | $0.05 \geq W$ | $5.0 \geq L$ | $0.1 > W$ | 1 | --- | $0.05 < W$ | Applied as point defect |
| Line | | Acceptable Qty. | | | | | | | | | | | | | | | | | | | | |
| L | W | | | | | | | | | | | | | | | | | | | | | |
| --- | $0.015 \geq W$ | Disregard | | | | | | | | | | | | | | | | | | | | |
| $5.0 \geq L$ | $0.03 \geq W$ | 2 | | | | | | | | | | | | | | | | | | | | |
| $5.0 \geq L$ | $0.05 \geq W$ | | | | | | | | | | | | | | | | | | | | | |
| $5.0 \geq L$ | $0.1 > W$ | 1 | | | | | | | | | | | | | | | | | | | | |
| --- | $0.05 < W$ | Applied as point defect | | | | | | | | | | | | | | | | | | | | |
| 5 | Rainbow | Not more than two color changes across the viewing area. | | | | | | | | | | | | | | | | | | | | |

| No | Item | Criterion | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|---|----------|-------|------------|---|---|---|----------|-------|----------|---|---|---|----------|----------|----------|------------------------|--|--|---|---|---|-----------|------------|----------|---|---|---|----------|----------|------------|
| 6 | <p>Chip</p> <p>Remark: X: Length direction Y: Short direction Z: Thickness direction t: Glass thickness W: Terminal Width</p> |  <p>Acceptable criterion</p> <table border="1" data-bbox="982 409 1339 493"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>≤ 2</td> <td>0.5mm</td> <td>$\leq t/2$</td> </tr> </tbody> </table>  <p>Acceptable criterion</p> <table border="1" data-bbox="974 703 1339 777"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>≤ 3</td> <td>0.5mm</td> <td>$\leq t$</td> </tr> </tbody> </table>  <p>Acceptable criterion</p> <table border="1" data-bbox="982 966 1339 1081"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>≤ 3</td> <td>≤ 2</td> <td>$\leq t$</td> </tr> <tr> <td colspan="2">shall not reach to ITO</td> <td></td> </tr> </tbody> </table>  <p>Acceptable criterion</p> <table border="1" data-bbox="974 1312 1339 1386"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>Disregard</td> <td>≤ 0.2</td> <td>$\leq t$</td> </tr> </tbody> </table>  <p>Acceptable criterion</p> <table border="1" data-bbox="974 1564 1307 1648"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>≤ 5</td> <td>≤ 2</td> <td>$\leq t/3$</td> </tr> </tbody> </table> | X | Y | Z | ≤ 2 | 0.5mm | $\leq t/2$ | X | Y | Z | ≤ 3 | 0.5mm | $\leq t$ | X | Y | Z | ≤ 3 | ≤ 2 | $\leq t$ | shall not reach to ITO | | | X | Y | Z | Disregard | ≤ 0.2 | $\leq t$ | X | Y | Z | ≤ 5 | ≤ 2 | $\leq t/3$ |
| X | Y | Z | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≤ 2 | 0.5mm | $\leq t/2$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | Y | Z | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≤ 3 | 0.5mm | $\leq t$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | Y | Z | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≤ 3 | ≤ 2 | $\leq t$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| shall not reach to ITO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | Y | Z | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Disregard | ≤ 0.2 | $\leq t$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | Y | Z | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≤ 5 | ≤ 2 | $\leq t/3$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| No. | Item | Criterion | | | | | | | | |
|-------------------------|----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------|------------------|-----------|-------------------------|---|---------------|---|
| 7 | Segment pattern W = Segment width $\phi = (X+Y)/2$ | <p>(1) Pin hole $\phi < 0.10\text{mm}$ is acceptable.</p>  <table border="1" data-bbox="917 535 1331 703"> <thead> <tr> <th>Point Size</th> <th>Acceptable Qty</th> </tr> </thead> <tbody> <tr> <td>$\phi \leq 1/4W$</td> <td>Disregard</td> </tr> <tr> <td>$1/4W < \phi \leq 1/2W$</td> <td>1</td> </tr> <tr> <td>$\phi > 1/2W$</td> <td>0</td> </tr> </tbody> </table> <p>Unit: m m</p> | Point Size | Acceptable Qty | $\phi \leq 1/4W$ | Disregard | $1/4W < \phi \leq 1/2W$ | 1 | $\phi > 1/2W$ | 0 |
| Point Size | Acceptable Qty | | | | | | | | | |
| $\phi \leq 1/4W$ | Disregard | | | | | | | | | |
| $1/4W < \phi \leq 1/2W$ | 1 | | | | | | | | | |
| $\phi > 1/2W$ | 0 | | | | | | | | | |
| 8 | Back-light | <p>(1) The color of backlight should correspond its specification. (2) Not allow flickering</p> | | | | | | | | |
| 9 | Soldering | <p>(1) Not allow heavy dirty and solder ball on PCB. (The size of dirty refer to point and dust defect) (2) Over 50% of lead should be soldered on Land.</p>  | | | | | | | | |
| 10 | Wire | <p>(1) Copper wire should not be rusted (2) Not allow crack on copper wire connection. (3) Not allow reversing the position of the flat cable. (4) Not allow exposed copper wire inside the flat cable.</p> | | | | | | | | |
| 11* | PCB | <p>(1) Not allow screw rust or damage. (2) Not allow missing or wrong putting of component.</p> | | | | | | | | |

| No | Item | Criterion |
|----|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 12 | Protruded W: Terminal Width |  <p>Acceptable criteria: $Y \leq 0.4$</p> |
| 13 | TAB | <p>1. Position</p>  <div style="border: 1px solid black; padding: 5px; width: fit-content; margin-left: auto; margin-right: auto;"> $W1 \leq 1/3W$ $H1 \leq 1/3H$ </div> <p>2 TAB bonding strength test</p>  <p> $P (=F/TAB \text{ bonding width}) \geq 650\text{gf/cm}$,(speed rate: 1mm/min) 5pcs per SOA (shipment) </p> |
| 14 | Total no. of acceptable Defect | <p>A. Zone</p> <p>Maximum 2 minor non-conformities per one unit. Defect distance: each point to be separated over 10mm</p> <p>B. Zone</p> <p>It is acceptable when it is no trouble for quality and assembly in customer's end product.</p> |

12.3 Reliability of LCM

Reliability test condition:

| Item | Condition | Time (hrs) | Assessment |
|----------------------|-------------------------------------------------|------------|----------------------------------------------|
| High temp. Storage | 80°C | 48 | No abnormalities in functions and appearance |
| High temp. Operating | 70°C | 48 | |
| Low temp. Storage | -30°C | 48 | |
| Low temp. Operating | -20°C | 48 | |
| Humidity | 40°C/ 90%RH | 48 | |
| Temp. Cycle | -20°C ← 25°C → 70°C (30 min ← 5 min → 30min) | 10cycles | |

Recovery time should be 24 hours minimum. Moreover, functions, performance and appearance, etc. shall be free from remarkable deterioration within 50,000 hours under ordinary operating and storage conditions room temperature ($20 \pm 8^\circ\text{C}$), normal humidity (below $45 \pm 20\%$ RH), and in the area not exposed to direct sun light. The life time is not content the life time of the LED (for the life time of LED which decay only 50%, in the industry the experience value is 50000 hours, but there are not any experimentation data to support this).

12.4 Precaution for using LCD/LCM

LCD/LCM is assembled and adjusted with a high degree of precision. Do not attempt to make any alteration or modification. The followings should be noted.

General Precautions:

1. LCD panel is made of glass. Avoid excessive mechanical shock or applying strong pressure onto the surface of display area.
2. The polarizer used on the display surface is easily scratched and damaged. Extreme care should be taken when handling. To clean dust or dirt off the display surface, wipe gently with cotton, or other soft material soaked with isopropyl alcohol, ethyl alcohol or trichlorotrifluoroethane, do not use water, ketone or aromatics and never scrub hard.
3. Do not tamper in any way with the tabs on the metal frame.
4. Do not make any modification on the PCB without consulting Orient Display.
5. When mounting a LCM, make sure that the PCB is not under any stress such as bending or twisting. Elastomer contacts are very delicate and missing pixels could result from slight dislocation of any of the elements.

6. Avoid pressing on the metal bezel, otherwise the elastomer connector could be deformed and lose contact, resulting in missing pixels and also cause rainbow on the display.
7. Be careful not to touch or swallow liquid crystal that might leak from a damaged cell. Any liquid crystal adheres to skin or clothes, wash it off immediately with soap and water.

Static Electricity Precautions:

1. CMOS-LSI is used for the module circuit; therefore operators should be grounded whenever he/she comes into contact with the module.
2. Do not touch any of the conductive parts such as the LSI pads; the copper leads on the PCB and the interface terminals with any parts of the human body.
3. Do not touch the connection terminals of the display with bare hand; it will cause disconnection or defective insulation of terminals.
4. The modules should be kept in anti-static bags or other containers resistant to static for storage.
5. Only properly grounded soldering irons should be used.
6. If an electric screwdriver is used, it should be grounded and shielded to prevent sparks.
7. The normal static prevention measures should be observed for work clothes and working benches.
8. Since dry air is inductive to static, a relative humidity of 50-60% is recommended.

Soldering Precautions:

1. Soldering should be performed only on the I/O terminals.
2. Use soldering irons with proper grounding and no leakage.
3. Soldering temperature: $280^{\circ}\text{C} \pm 10^{\circ}\text{C}$
4. Soldering time: 3 to 4 second.
5. Use eutectic solder with resin flux filling.
6. If flux is used, the LCD surface should be protected to avoid spattering flux.
7. Flux residue should be removed.

Operation Precautions:

1. The viewing angle can be adjusted by varying the LCD driving voltage V_o .
2. Since applied DC voltage causes electro-chemical reactions, which deteriorate the display, the applied pulse waveform should be a symmetric waveform such that no DC component remains. Be sure to use the specified operating voltage.
3. Driving voltage should be kept within specified range; excess voltage will shorten display life.
4. Response time increases with decrease in temperature.
5. Display color may be affected at temperatures above its operational range.
6. Keep the temperature within the specified range usage and storage. Excessive temperature and humidity could cause polarization degradation, polarizer peel-off or generate bubbles.
7. For long-term storage over 40°C is required, the relative humidity should be kept below 60%, and avoid direct sunlight.

Limited Warranty

Orient Display LCDs and modules are not consumer products, but may be incorporated by OD's customers into consumer products or components thereof, Orient Display does not warrant that its LCDs and components are fit for any such particular purpose.

1. The liability of Orient Display is limited to repair or replacement on the terms set forth below. Orient Display will not be responsible for any subsequent or consequential events or injury or damage to any personnel or user including third party personnel and/or user. Unless otherwise agreed in writing between Orient Display and the customer, Orient Display will only replace or repair any of its LCD which is found defective electrically or visually when inspected in accordance with Orient Display general LCD inspection standard. (Copies available on request)
2. No warranty can be granted if any of the precautions state in handling liquid crystal display above has been disregarded. Broken glass, scratches on polarizer mechanical damages as well as defects that are caused accelerated environment tests are excluded from warranty.
3. In returning the LCD/LCM, they must be properly packaged; there should be detailed description of the failures or defect.