
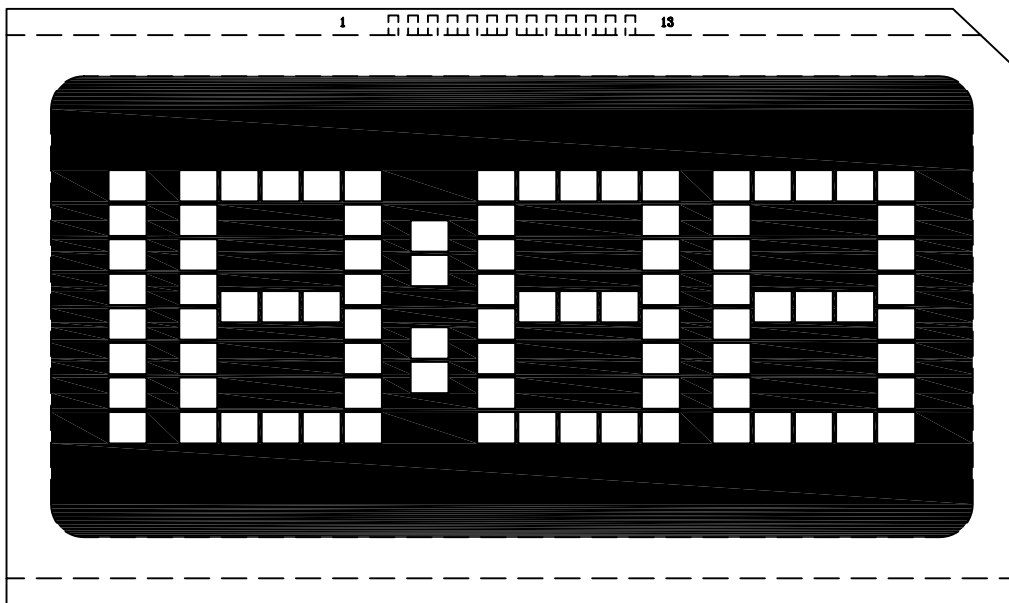


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13
COM1		2D	2E	2G	2C	4D	3E	3G	3C	4E	4G	4C	COM1
COM2	COM2	1BC	2F	2A	2B	COL	3F	3AD	3B	4F	4A	4B	

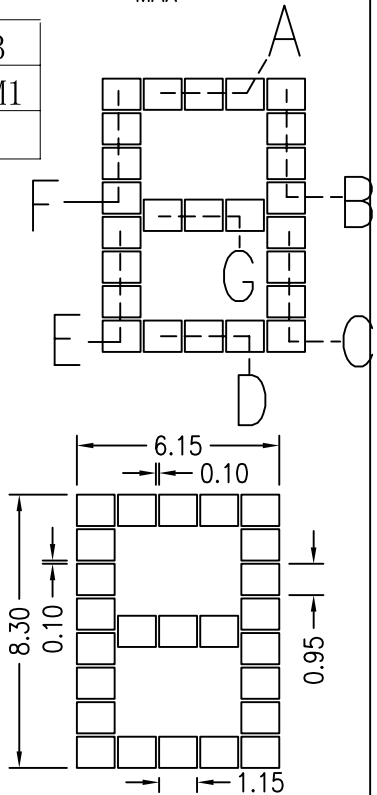

NOTES:

- |   |                             |
|---|-----------------------------|
| 1. DISPLAY TYPE: TN                       | 5. OPERATING VOLTAGE: 4.5 V |
| 2. VIEWING DIRECTION: 6:00                | 6. OPERATING TEMP: -20~70°C |
| 3. POLARIZER MODE: NEGATIVE/TRANSFLECTIVE | 7. STORAGE TEMP: -30~80°C   |
| 4. DRIVER METHOD: 1/4 DUTY 1/3 BIAS       | 8. CONNECTOR: WITHOUT PIN   |