
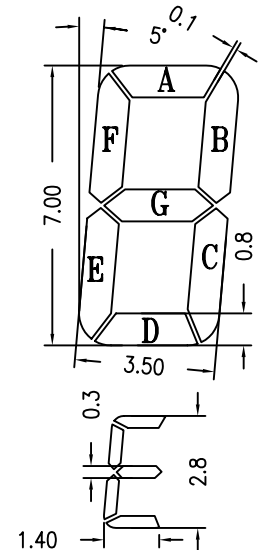


| | | | | | | | | | | | | | | | | | | | |
|------|------|----|----|----|----|----|----|----|-----|----|----|----|----|----|----|----|-------|----|------|
| PIN | 01 | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| COM1 | / | D1 | G1 | / | D2 | E2 | G2 | C2 | D4 | E3 | G3 | C3 | D3 | E4 | G4 | C4 | / | D5 | COM1 |
| COM2 | COM2 | E1 | A1 | B1 | C1 | F2 | A2 | B2 | COL | F3 | A3 | B3 | P1 | F4 | A4 | B4 | ⊗AEF5 | G5 | / |

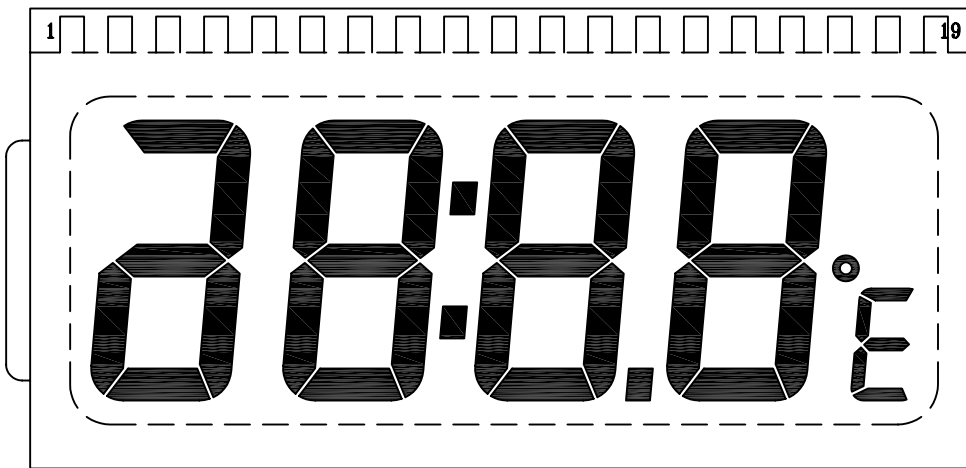

NOTES:

- | | | | |
|-----------------------|---------------------|-----------------------|-------------|
| 1. DISPLAY TYPE: | TN | 5. OPERATING VOLTAGE: | 3.0 V |
| 2. VIEWING DIRECTION: | 6:00 | 6. OPERATING TEMP: | -20~70°C |
| 3. POLARIZER MODE: | POSITIVE/REFLECTIVE | 7. STORAGE TEMP: | -30~80°C |
| 4. DRIVER METHOD: | 1/2 DUTY 1/2 BIAS | 8. CONNECTOR: | WITHOUT PIN |