


RoHS Compliant

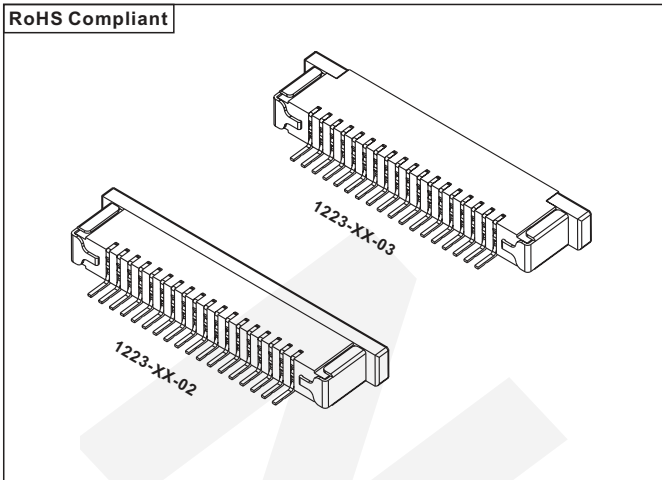

Specifications


1. Current Rating: 1.0A AC/DC.
2. Voltage Rating: 100V AC/DC.
3. Contact Resistance: 30m ohm. max.
4. Insulation Resistance: 100M ohm. Min.
5. Withstanding Voltage: 500V AC for one minute.
6. Operating Temperature Range: -25°C to +105°C.

Material and Finish


1. Insulator: High Temp Plastic (Nylon 6T UL94V-0).
2. Contact: Phosphor Bronze.
3. Plating: Tin Plated.

Feature




1. Design for Digital Cameras, Mobile Phones, MP3, MP4, Home Appliances, Aviation Electronics, Automobile Electronics and Computer(PC) Peripherals.

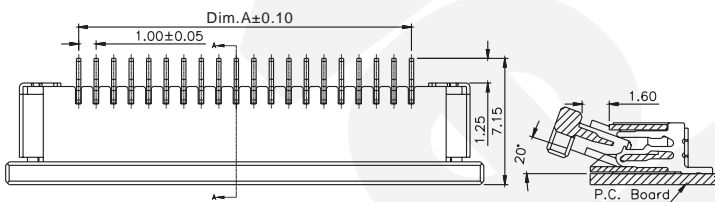

P/N: 1223-XX-02

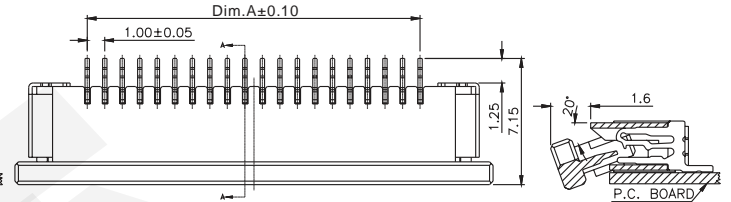


P/N: 1223-XX-03

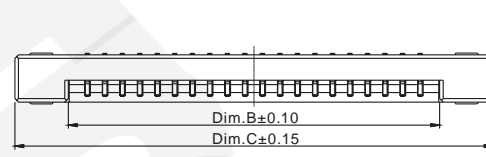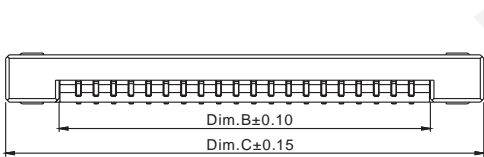

Engineering Dimension

Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
3	2.00	4.20	10.40	13	12.00	14.20	20.40	23	22.00	24.20	30.40
4	3.00	5.20	11.40	14	13.00	15.20	21.40	24	23.00	25.20	31.40
5	4.00	6.20	12.40	15	14.00	16.20	22.40	25	24.00	26.20	32.40
6	5.00	7.20	13.40	16	15.00	17.20	23.40	26	25.00	27.20	33.40
7	6.00	8.20	14.40	17	16.00	18.20	24.40	27	26.00	28.20	34.40
8	7.00	9.20	15.40	18	17.00	19.20	25.40	28	27.00	29.20	35.40
9	8.00	10.20	16.40	19	18.00	20.20	26.40	29	28.00	30.20	36.40
10	9.00	11.20	17.40	20	19.00	21.20	27.40	30	29.00	31.20	37.40
11	10.00	12.20	18.40	21	20.00	22.20	28.40	31	30.00	32.20	38.40
12	11.00	13.20	19.40	22	21.00	23.20	29.40	32	31.00	33.20	39.40

FPC Dimension Reference

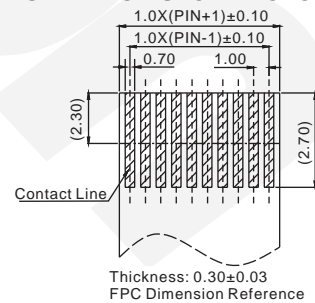


Ordering Information

1223-XX-XX-01

① ② ③

① No. Of Contacts	② 02: Bottom Contact 03: Top Contact	③ 01: Without Metal Ear Blank: Standard Type With Metal Ear
-------------------	---	---

Recommended PCB Layout

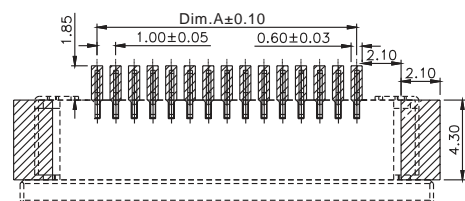

No. of contacts please consult to our sales dept.

Unit:mm