

**Specifications**





1. Current Rating: 0.5A AC/DC.
2. Voltage Rating: 50V AC/DC.
3. Contact Resistance: 20m ohm. max.
4. Insulation Resistance: 50M ohm. Min.
5. Withstanding Voltage: 500V AC for one minute.
6. Operating Temperature Range: -25°C to +85°C.

**Material and Finish**

1. Insulator: High Temp Plastic (Nylon 46 UL94V-0).
2. Contact: Phosphor Bronze.
3. Plating: Tin Plated.

**Feature**

1. Design for Digital Cameras, Mobile Phones, MP3, MP4, Home Appliances, Aviation Electronics, Automobile Electronics and Computer(PC) Peripherals.

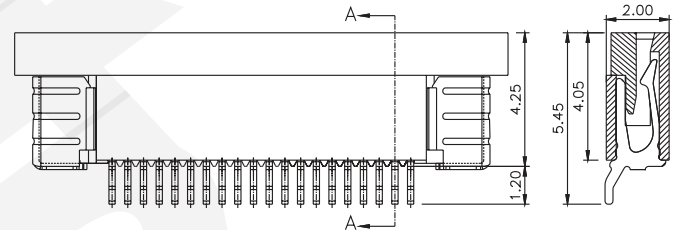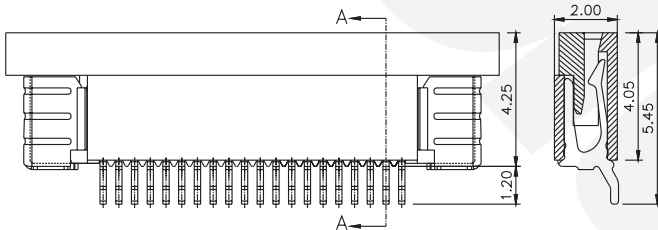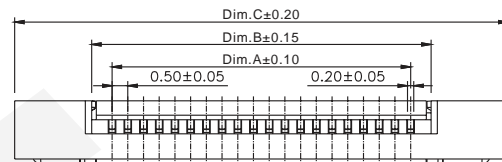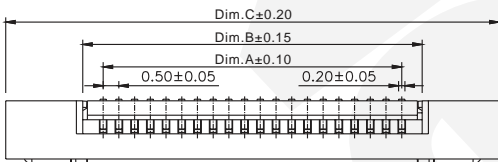

P/N: 1226-XX-02


P/N: 1226-XX-03

FPC/FFC Connector

**Engineering Dimension**

Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
4	1.50	2.80	7.70	20	9.50	10.80	15.70	36	17.50	18.80	23.70
5	2.00	3.30	8.20	21	10.00	11.30	16.20	37	18.00	19.30	24.20
6	2.50	3.80	8.70	22	10.50	11.80	16.70	38	18.50	19.80	24.70
7	3.00	4.30	9.20	23	11.00	12.30	17.20	39	19.00	20.30	25.20
8	3.50	4.80	9.70	24	11.50	12.80	17.70	40	19.50	20.80	25.70
9	4.00	5.30	10.20	25	12.00	13.30	18.20	41	20.00	21.30	26.20
10	4.50	5.80	10.70	26	12.50	13.80	18.70	42	20.50	21.80	26.70
11	5.00	6.30	11.20	27	13.00	14.30	19.20	43	21.00	22.30	27.20
12	5.50	6.80	11.70	28	13.50	14.80	19.70	44	21.50	22.80	27.70
13	6.00	7.30	12.20	29	14.00	15.30	20.20	45	22.00	23.30	28.20
14	6.50	7.80	12.70	30	14.50	15.80	20.70	46	22.50	23.80	28.70
15	7.00	8.30	13.20	31	15.00	16.30	21.20	47	23.00	24.30	29.20
16	7.50	8.80	13.70	32	15.50	16.80	21.70	48	23.50	24.80	29.70
17	8.00	9.30	14.20	33	16.00	17.30	22.20	49	24.00	25.30	30.20
18	8.50	9.80	14.70	34	16.50	17.80	22.70	50	24.50	25.80	30.70
19	9.00	10.30	15.20	35	17.00	18.30	23.20				

**FPC Dimension Reference**




**Ordering Information**

**1226-XX-XX**

① ②

① No. Of Contacts	② 02: Bottom Contact Type 03: Top Contact Type
-------------------	---

**Recommended PCB Layout**

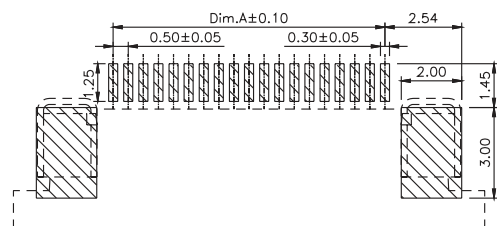

Unit:mm