



ORIENT DISPLAY

MAKE THINGS POSSIBLE

Specification for TFT

AGU240320A00-2.8N6NSM-R

Revision 01



A	Orient Display
GU	GUS System
240320	Resolution 240 x 320
A00	Serial A00
2.8	2.8", Module Dimension 62.00 * 69.20 * 7.77mm (PCB)
N	TN Display
6	6 O'clock Viewing Direction
N	Top: -20~+70°C; Tstr: -30~+80°C
S	Standard Configuration
M	Medium Brightness, 460cd/m2
R	Resistive Touch Panel
/	Transmissive Polarizer
/	ILI9341V OR COMPATIBLE
/	UART Interface



REVISION RECORD

Rev No.	Rev date	Contents	Remarks
01	2022-2-19	First release	Preliminary

CONTENTS

1. DISPLAY CHARACTERISTICS	4
2. PIN DESCRIPTION.....	4
3. ELECTRICAL CHARACTERISTICS	4
4. APPERANCE STANDARD.....	5
5. RELIABILITY TEST CONDITIONS	8
6. HANDLING PRECAUTIONS.....	9
7. PRECAUTION FOR USE	10
8. PACKING SPECIFICATION	10
9. MECHANICAL DRAWING (UNIT MM, UN-TOLERATED ±0.3MM).....	11

1. DISPLAY CHARACTERISTICS

Item	Contents	Note
Resolution(H*V)	240×320 Dots	
Colors	65k(R5G6B5)	
Active area (L*W)	43.2mm(L)×57.6mm(W)	
Viewing area (L*W)	44.2mm(L)×58.6 mm(W)	
Module size (L*W*H)	50.00mm(L)×69.2mm(W)x7.7(H)	
Back light type	LED	
Touch Panel Type	With TP or without TP	
Controller IC	NP9158	
Viewing Direction	6 o'clock	
Contrast Ratio	500(typ.)	

2. Pin Description

Pin No.	Symbol	External Connection	Function Description
1	GND	Power Supply	GND
2	RX	MPU	3.3V TTL level 232_RX-
3	TX	MPU	3.3V TTL level 232_TX-
4	VDD	Power Supply	3.3V

3. Electrical Characteristics


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating Temperature Range	Top	Absolute Max	-20	-	+70	°C
Storage Temperature Range	Tst	Absolute Max	-30	-	+80	°C
Supply Voltage	VDD		3.0	3.3	3.6	V
Input High Voltage	VIH		0.8*VDD	-	VDD	V
Input Low Voltage	VIL		0	-	0.2*VDD	V
Supply Current	IVCI		-	90	-	mA
Power Consumption	PLCM		-	280	-	mW

4. Appearance Standard


4.1 Appearance Inspection Condition

Visual inspection should be done under the following condition.

- 1) The inspection should be done under in the dark room (about 1000lx, 500lx min, and non-directive)
- 2) The distance between eyes of an inspector and the LCD module is 30cm.
- 3) The Viewing zone is shown the figure. (Viewing angle $\leq 25^\circ$)

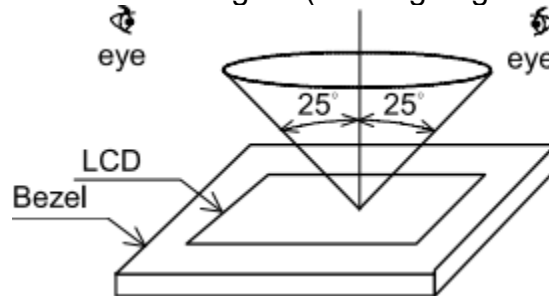

4.2 Definition Of Each Zone

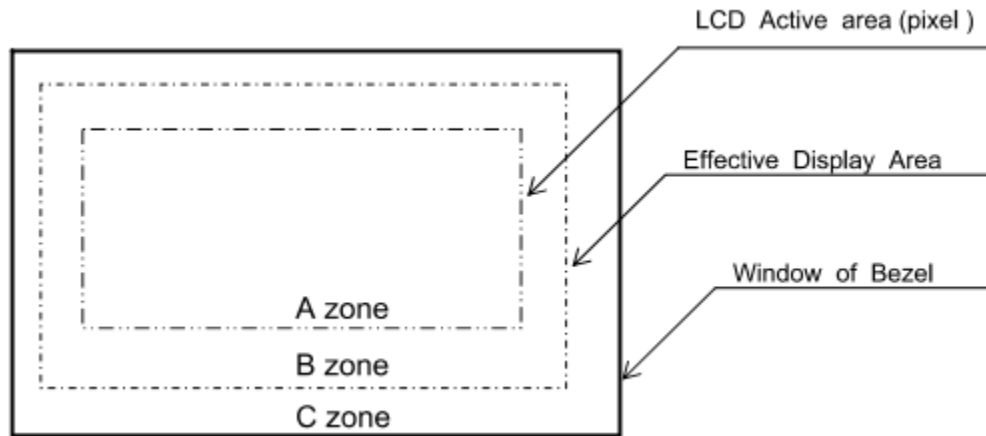


4.3 Appearance Specification

Note: if a problem occurs in respect to any of these items, both parties will discuss in more detail.

Note

- (1) Definition of average diameter D




$$D = \frac{a+b}{2}$$

- (2) Definition of length L and width W



- (3) Definition of pinhole



c : Saliency

No.	ITEM	CRITERIA			A	B	
L C D	Scratches	Serious one is not allowed			*	-	
	Dent	Serious one is not allowed			*	-	
	Wrinkles in Polarizer	Serious one is not allowed			*	-	
	Bubbles	Average diameter D(mm)		Maximum number acceptable		○	-
		$D \leq 0.2$		Ignore			
		$0.2 < D \leq 0.3$		12			
		$0.3 < D \leq 0.5$		3			
		$0.5 < D$		None			
	Stains, Foreign Materials, Dark Spot	Filamentous			○	-	
		Length L(mm)	Width W(mm)	Maximum number acceptable			
		$L \leq 2.0$	$W \leq 0.03$	Ignore			
		$L \leq 3.0$	$0.03 < W \leq 0.05$	6			
		$L \leq 2.5$	$0.05 < W \leq 0.1$	1			
		Round			○	-	
		Average diameter D(mm)	Maximum number acceptable	Minimum space			
		$D < 0.2$	Ignore	-			
		$0.2 \leq D < 0.33$	8	10mm			
		$0.33 \leq D$	None	-			
	Total	Filamentous + Round = 10					
	Those wiped out easily are acceptable			○	○		
	Pinhole	Average diameter D(mm)		Maximum number acceptable		○	-
		$D \leq 0.15$		Ignore			
		$0.15 < D \leq 0.3$		10			
		$C \leq 0.015$		ignore			
	Contrast Irregularity (Spot)	Average diameter D(mm)		Maximum number acceptable	Minimum space	○	-
		$D \leq 0.25$		Ignore	-		
		$0.25 < D \leq 0.35$		10	20mm		
		$0.35 < D \leq 0.5$		4	20mm		
$0.5 < D$		None	-				
Contrast Irregularity (Line) (Filamentous)	Width D(mm)	Length L(mm)	Maximum number acceptable	Minimum space	○	-	
	$W \leq 0.25$	$L \leq 1.2$	2	20mm			
	$W \leq 0.2$	$L \leq 1.5$	3	20mm			
	$W \leq 0.15$	$L \leq 2.0$	3	20mm			
	$W \leq 0.1$	$L \leq 3.0$	4	20mm			
	Total		6				

No.	ITEM	CRITERIA			APPLIED ZONE
TOUCH PANEL	Scratches	Width W(mm)	Length L(mm)	Maximum number acceptable	A,B
		$W > 0.1$	$L \geq 10$	None	
		$0.10 \geq W > 0.05$	$L < 10$	4 pcs max.	
		$0.05 \geq W$	$L < 10$	Ignored	
	Foreign Materials	Filamentous (Line shape)			A,B
		Width W(mm)	Length L(mm)	Maximum number acceptable	
		$W > 0.10$	-	Dust (circular)	
		$0.10 \geq W > 0.05$	$3 < L$	None	
		$0.05 \geq W$	$L \leq 3$	Ignored	
		Round(Dot shape)			A,B
		Average diameter D(mm)	Maximum number acceptable		
		$D > 0.35$	None		
	$0.35 \geq D > 0.25$	6 psc max.			
		$D \leq 0.25$	Ignored		A,B

5. Reliability Test Conditions

No.	Test item	Test condition	Inspection after test
1	High temperature storage	80±2°C/120 hours	Note 1,2
2	Low temperature storage	-30±2°C/120 hours	
3	High temperature operating	70±2°C/120 hours	
4	Low temperature operating	-20±2°C/120 hours	
5	Temperature cycle	-20±2°C~25°C~70±2°C*10cycles (30min.) (5min.) (30min.)	
6	Damp proof test	60°C*90% RH/96 hours	
7	Vibration test	Frequency : 10Hz~55Hz~10Hz Amplitude : 1.5mm , X , Y , Z direction for total 3hours (Packing condition)	
8	Dropping test	Drop to the ground from 1m height, one time, every side of carton. (Packing condition)	
9	ESD test	Voltage : ±800V R : 330Ω C : 150pF Air discharge, 1 time	
Remark : Note 1: No condensation to be observed. Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.			

6. HANDLING PRECAUTIONS

6.1 Mounting method

The LCD module consists of two thin glass plates with polarizers which easily be damaged. And since the module is so constructed as to be fixed by utilizing fitting holes in the printed circuit board. Extreme care should be needed when handling the LCD modules.

6.2 Caution of LCD handling and cleaning

When cleaning the display surface, Use soft cloth with solvent [recommended below] and wipe lightly :

- .Isopropyl alcohol
- .Ethyl alcohol

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent :

- .Water
- .Aromatics

Do not wipe ITO pad area with the dry or hard materials that will damage the ITO patterns

Do not use the following solvent on the pad or prevent it from being contaminated :

- .Soldering flux
- .Chlorine (Cl) , Sulfur (S)

If goods were sent without being silicon coated on the pad, ITO patterns could be damaged due to the corrosion as time goes on.

If ITO corrosion happens by miss-handling or using some materials such as Chlorine (Cl), Sulfur (S) from customer, Responsibility is on customer.

6.3 Caution against static charge

The LCD module uses C-MOS LSI drivers, so we recommend that you :

Connect any unused input terminal to Vdd or Vss, do not input any signals before power is turned on, and ground your body, work/assembly areas, assembly equipment to protect against static electricity.

6.4 Packing

Module employs LCD elements and must be treated as such.

- .Avoid intense shock and falls from a height.
- .To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity.

6.5 Caution for operation

- .It is an indispensable condition to drive LCD's within the specified voltage limit since the higher voltage than the limit causes the shorter LCD life.
- .An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current drive should be avoided.
- .Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark color in them. However those phenomena do not mean malfunction or out of order with LCD's, which will come back in the specified operation temperature.
- .If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- .A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.
- .Usage under the maximum operating temperature, 50%Rh or less is required.
- .When fixed patterns are displayed for a long time, remnant image is likely to occur.

6.6 Storage

In the case of storing for a long period of time for instance, for years for the purpose of replacement use, the following ways are recommended.

- .Storing in an ambient temperature 10°C to 30°C, and in a relative humidity of 45% to 75%. Don't expose to sunlight or fluorescent light.
- .Storing in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it. And with no desiccant.
- .Placing in a dark place where neither exposure to direct sunlight nor light's keeping the storage temperature range.
- .Storing with no touch on polarizer surface by anything else.

It is recommended to store them as they have been contained in the inner container at the time of delivery

from us.

6.7 Safety

- .It is recommendable to crash damaged or unnecessary LCD's into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- .When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water.

7. PRECAUTION FOR USE

7.1 A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.

7.2 On the following occasions, the handing of problem should be decided through discussion and agreement between responsible of the both parties.

- .When a question is arisen in this specification.
- .When a new problem is arisen which is not specified in this specifications.
- .When an inspection specifications change or operating condition change in customer is reported to ORIENTDISPLAY, and some problem is arisen in this specification due to the change.
- .When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

8. PACKING SPECIFICATION

---TBD

9.Mechanical Drawing (Unit mm, Un-tolerated ±0.3mm)

